

ISSN 2518-1467 (Online),
ISSN 1991-3494 (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ

Х А Б А Р Ш Ы С Ы

ВЕСТНИК

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН

THE BULLETIN

OF THE NATIONAL ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN

1944 ЖЫЛДАН ШЫҒА БАСТАҒАН
ИЗДАЕТСЯ С 1944 ГОДА
PUBLISHED SINCE 1944

5

АЛМАТЫ
АЛМАТЫ
ALMATY

2018

SEPTEMBER
СЕНТЯБРЬ
ҚЫРКҮЙЕК

NAS RK is pleased to announce that Bulletin of NAS RK scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of Bulletin of NAS RK in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential multidiscipline content to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы "ҚР ҰҒА Хабаршысы" ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруда. Web of Science зерттеушілер, авторлар, баспашылар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабаршысының Emerging Sources Citation Index-ке енуі біздің қоғамдастық үшін ең өзекті және беделді мультидисциплинарлы контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Вестник НАН РК» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Вестника НАН РК в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному мультидисциплинарному контенту для нашего сообщества.

Б а с р е д а к т о р ы

х. ғ. д., проф., ҚР ҰҒА академигі

М. Ж. Жұрынов

Р е д а к ц и я а л қ а с ы:

Абиев Р.Ш. проф. (Ресей)
Абишев М.Е. проф., корр.-мүшесі (Қазақстан)
Аврамов К.В. проф. (Украина)
Аппель Юрген проф. (Германия)
Баймуқанов Д.А. проф., корр.-мүшесі (Қазақстан)
Байпақов К.М. проф., академик (Қазақстан)
Байтулин И.О. проф., академик (Қазақстан)
Банас Иозеф проф. (Польша)
Берсимбаев Р.И. проф., академик (Қазақстан)
Велихов Е.П. проф., РҒА академигі (Ресей)
Гашимзаде Ф. проф., академик (Әзірбайжан)
Гончарук В.В. проф., академик (Украина)
Давлетов А.Е. проф., корр.-мүшесі (Қазақстан)
Джрбашян Р.Т. проф., академик (Армения)
Қалимолдаев М.Н. проф., академик (Қазақстан), бас ред. орынбасары
Лаверов Н.П. проф., академик РАН (Россия)
Лупашку Ф. проф., корр.-мүшесі (Молдова)
Мохд Хасан Селамат проф. (Малайзия)
Мырхалықов Ж.У. проф., академик (Қазақстан)
Новак Изабелла проф. (Польша)
Огарь Н.П. проф., корр.-мүшесі (Қазақстан)
Полещук О.Х. проф. (Ресей)
Поняев А.И. проф. (Ресей)
Сагиян А.С. проф., академик (Армения)
Сатубалдин С.С. проф., академик (Қазақстан)
Таткеева Г.Г. проф., корр.-мүшесі (Қазақстан)
Умбетаев И. проф., академик (Қазақстан)
Хрипунов Г.С. проф. (Украина)
Юлдашбаев Ю.А. проф., РҒА корр.-мүшесі (Ресей)
Якубова М.М. проф., академик (Тәжікстан)

«Қазақстан Республикасы Ұлттық ғылым академиясының Хабаршысы».

ISSN 2518-1467 (Online),

ISSN 1991-3494 (Print)

Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы»РҚБ (Алматы қ.)

Қазақстан республикасының Мәдениет пен ақпарат министрлігінің Ақпарат және мұрағат комитетінде
01.06.2006 ж. берілген №5551-Ж мерзімдік басылым тіркеуіне қойылу туралы куәлік

Мерзімділігі: жылына 6 рет.

Тиражы: 2000 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., 220, тел.: 272-13-19, 272-13-18,
www: nauka-nanrk.kz, bulletin-science.kz

© Қазақстан Республикасының Ұлттық ғылым академиясы, 2018

Типографияның мекенжайы: «Аруна» ЖК, Алматы қ., Муратбаева көш., 75.

Г л а в н ы й р е д а к т о р
д. х. н., проф. академик НАН РК
М. Ж. Журинов

Р е д а к ц и о н н а я к о л л е г и я:

Абиев Р.Ш. проф. (Россия)
Абишев М.Е. проф., член-корр. (Казахстан)
Аврамов К.В. проф. (Украина)
Апель Юрген проф. (Германия)
Баймуканов Д.А. проф., чл.-корр. (Казахстан)
Байпаков К.М. проф., академик (Казахстан)
Байтулин И.О. проф., академик (Казахстан)
Банас Иозеф проф. (Польша)
Берсимбаев Р.И. проф., академик (Казахстан)
Велихов Е.П. проф., академик РАН (Россия)
Гашимзаде Ф. проф., академик (Азербайджан)
Гончарук В.В. проф., академик (Украина)
Давлетов А.Е. проф., чл.-корр. (Казахстан)
Джрбашян Р.Т. проф., академик (Армения)
Калимолдаев М.Н. академик (Казахстан), зам. гл. ред.
Лаверов Н.П. проф., академик РАН (Россия)
Лупашку Ф. проф., чл.-корр. (Молдова)
Моход Хасан Селамат проф. (Малайзия)
Мырхалыков Ж.У. проф., академик (Казахстан)
Новак Изабелла проф. (Польша)
Огарь Н.П. проф., чл.-корр. (Казахстан)
Полещук О.Х. проф. (Россия)
Поняев А.И. проф. (Россия)
Сагиян А.С. проф., академик (Армения)
Сатубалдин С.С. проф., академик (Казахстан)
Таткеева Г.Г. проф., чл.-корр. (Казахстан)
Умбетаев И. проф., академик (Казахстан)
Хрипунов Г.С. проф. (Украина)
Юлдашбаев Ю.А. проф., член-корр. РАН (Россия)
Якубова М.М. проф., академик (Таджикистан)

«Вестник Национальной академии наук Республики Казахстан».

ISSN 2518-1467 (Online),

ISSN 1991-3494 (Print)

Собственник: РОО «Национальная академия наук Республики Казахстан» (г. Алматы)

Свидетельство о постановке на учет периодического печатного издания в Комитете информации и архивов Министерства культуры и информации Республики Казахстан №5551-Ж, выданное 01.06.2006 г.

Периодичность: 6 раз в год

Тираж: 2000 экземпляров

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел. 272-13-19, 272-13-18.

www: nauka-nanrk.kz, bulletin-science.kz

© Национальная академия наук Республики Казахстан, 2018

Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбаева, 75

E d i t o r i n c h i e f

doctor of chemistry, professor, academician of NAS RK

M. Zh. Zhurinov

E d i t o r i a l b o a r d :

Abiyev R.Sh. prof. (Russia)
Abishev M.Ye. prof., corr. member. (Kazakhstan)
Avramov K.V. prof. (Ukraine)
Appel Jurgen, prof. (Germany)
Baimukanov D.A. prof., corr. member. (Kazakhstan)
Baipakov K.M. prof., academician (Kazakhstan)
Baitullin I.O. prof., academician (Kazakhstan)
Joseph Banas, prof. (Poland)
Bersimbayev R.I. prof., academician (Kazakhstan)
Velikhov Ye.P. prof., academician of RAS (Russia)
Gashimzade F. prof., academician (Azerbaijan)
Goncharuk V.V. prof., academician (Ukraine)
Davletov A.Ye. prof., corr. member. (Kazakhstan)
Dzhrbashian R.T. prof., academician (Armenia)
Kalimoldayev M.N. prof., academician (Kazakhstan), deputy editor in chief
Laverov N.P. prof., academician of RAS (Russia)
Lupashku F. prof., corr. member. (Moldova)
Mohd Hassan Selamat, prof. (Malaysia)
Myrkhalykov Zh.U. prof., academician (Kazakhstan)
Nowak Isabella, prof. (Poland)
Ogar N.P. prof., corr. member. (Kazakhstan)
Poleshchuk O.Kh. prof. (Russia)
Ponyaev A.I. prof. (Russia)
Sagiyani A.S. prof., academician (Armenia)
Satubaldin S.S. prof., academician (Kazakhstan)
Tatkeyeva G.G. prof., corr. member. (Kazakhstan)
Umbetayev I. prof., academician (Kazakhstan)
Khripunov G.S. prof. (Ukraine)
Yuldashbayev Y.A., prof. corresponding member of RAS (Russia)
Yakubova M.M. prof., academician (Tadjikistan)

Bulletin of the National Academy of Sciences of the Republic of Kazakhstan.

ISSN 2518-1467 (Online),

ISSN 1991-3494 (Print)

Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty)

The certificate of registration of a periodic printed publication in the Committee of Information and Archives of the Ministry of Culture and Information of the Republic of Kazakhstan N 5551-Ж, issued 01.06.2006

Periodicity: 6 times a year

Circulation: 2000 copies

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,
<http://nauka-nanrk.kz/>, <http://bulletin-science.kz>

© National Academy of Sciences of the Republic of Kazakhstan, 2018

Address of printing house: ST "Aruna", 75, Muratbayev str, Almaty

Zh.K. Kairbekov¹, I. M. Jeldybayeva^{1*}, Ye. T. Yermoldina¹, A. S. Maloletnev²

¹SSE Research Institute of New Chemical Technologies and Materials,
RSE Al-Farabi Kazakh National University, Almaty, Kazakhstan,

²Moscow Mining Institute NITU MISiS, Moscow, Russia.

*E-mail: indiko_87@mail.ru

THERMAL CRACKING OF FUEL OIL IN SLATE MIXTURE

Abstract. The results of investigation of thermal cracking of fuel oil of Zhanazhol deposit in the mixture with bituminous slate are specified in this article to obtain motor fuels and raw materials for catalytic cracking. The dependence of light distillate fractional yield of slate concentration (3-12 wt. %), temperature (668-708 K) and time of thermal cracking are determined by the method of non-linear regression. According to the light distillate fractional yield, the following can be considered as optimal conditions of reaction: temperature 688 K, time of treatment 60 minutes and quantity of activating agent (slate) 9 wt. %. Total light distillate fractional yield under these conditions reaches 50.8 wt. %. The obtained light distillates of cracking contain moderate quantity of aromatic hydrocarbons (25.5-30.1 %), unsaturated compounds (iodine value is equal to 1.5-3.9) and very small amount of sulphur (0.01-0.04 wt. %), that ensures compliance with modern requirements for gasoline and diesel fuels according to environmentally hazardous components.

Key words: thermocatalytic cracking, activating agents, slate, fuel oil.

Introduction. Ever-growing demand on motor fuels, which at least pollute environment, stipulates further development of advanced processing of high-molecular oil raw material (boiling temperature exceeds 520-560 °C), as well as solid combustible minerals (coal, slate, top soil).

Strengthening of requirements for the quality of obtained products leads to significant changes of process diagrams and methods of use of the specified types of raw materials [1-3].

An original process of thermochemical treatment of black oil fuel of native and destructive origin (fuel oil, tar, reduced pyrolysis resin, cracked residual, used oils, etc.) is developed in Russian and Kazakhstan, which includes the use of activating agents, which have no analogues abroad. This process is implemented at a pressure of 0.5-2 MPa, temperature of 400-430 °C without hydrogen [4-6].

Natural agents of sapropelite origin (bituminous slate, top soil, sapropelites, liptobiolites, boghead minerals) are used as activating agents. The effect of their interaction on oil residuals is studied on the example of use of bituminous slate [7-12]. It is established, that organic and mineral parts of bituminous slate have an activating influence on thermal conversion of heavy-oil products. Thus, various compounds, offering properties of hydrogen donors are generated during deconstruction of organic mass of slate (kerogen) within a range of temperatures of 370-420 °C. These compounds actively conduce to the hydrogenation reaction of unsaturated compound, which are created during cracking of oil residuals and prevent heavy carbon producing.

On the other hand, mineral part of slate, which contains aluminosilicates, black iron oxide, molybdenum, cobalt, nickel and other catalytic active metals, also conduces to the intensification of reactions of cracking and hydrogenation. While using bituminous slate as activating agent in the quantity of 5-25 % and containing 15-70 % of kerogen, the process of thermal cracking of oil residuals, implemented within a range of temperature of 390-450 °C can be controlled, with light distillate fractional yield up to 70 % without pellet and carbon producing, not exceeding 5 % [13-20].

Experiment. The results of investigation of development of slate thermal cracking in the mixture with refined bituminous slate are specified in this article to obtain components of motor fuels and raw materials for catalytic cracking.

Samples of bituminous slate of JSC Kverts (Kenderlyk deposit), additionally enriched by the floatation and liquid centrifugal separation methods, with the following specifications (wt. %) have been used for the investigations: W^a 1.2-1.3; A^d 18-22; C^{daf} 74.2-74.7; H^{daf} 8.9-9.0; S^{daf} 1.2-1.4; N^{daf} 0.4-0.5; Q^{daf} 14.5-15.0. Silicium (58.2 wt. %) and aluminium compounds (17.2 wt. %) prevail in the composition of mineral part of Kenderlyk slate.

Fuel oil of Zhanazhol oil with a boiling temperature of >520 °C with the following specifications has been used as raw material: density at a temperature of 20 °C 0.933 g/cm³; viscosity 9.8 cSt.; content of asphaltene 1.6 and solids 0.3 wt. %. Thermal cracking has been carried out in rotating autoclave with a volume of 2 l at a temperature of 400-440 °C and operating pressure of nitrogen of 5-8 MPa.

Slate has been mixed with fuel oil up to 12 wt. % while preparing oil and slate paste refined in ball mill (table 1). The obtained paste has been singly dispersed in laminar dispersant of Pushkin-Khotuntsev with holes between plates of 1.0 mm at a speed of moving plate rotation of 1420 rpm.

Table 1 – Influence of slate concentration on product yield (wt. %) of catalytic thermal treatment of fuel oil and slate (688 K, 60 min, 5 MPa)

The thermolysis product	The amount of oil shale, wt. %				
	0	3	6	9	12
Gas	8,1	4,9	5,3	5,5	7,8
Fraction up to 180 °C	15,0	7,1	10,8	13,5	20,0
Fraction 180-360 °C	14,0	28,7	31,8	37,3	39,0
Fraction > 360 °C	62,9	59,3	52,1	43,3	33,2
The total yield of light distillates	29,0	35,8	42,6	50,8	59,0

The results of investigation of slate concentration influence on thermal cracking of fuel oil show that the increase in concentration of slate leads to the increase in light distillate fractional yield up to 50 %.

It is worth noting that thermal cracking of fuel oil with slate additives proceeds with insignificant gas production (4.9-8.1 wt. %), ensuring the high yield (more than 90 %) of ash-free hydrotreated feed and components of motor fuels.

According to the data specified in Table 1, the dependence of light distillate fractional yield on the quantity of slate (x) and fractional yield >360 °C (y) has been determined by the method of non-linear regression.

$$G(x, y) = 4,483*x + 0,4569*y - 0,02491*x*y \quad (1)$$

Data specified in table 2 shows that function $G(x, y)$ satisfactorily present experimental data. The diagram of function $G(x, y)$ is shown on figure 1. It can be seen that the dependence of light distillate yield on the quantity of slate is linear: light distillate yield increases, when the slate weight increases.

The results of investigations under autoclave conditions are specified in tables 3–5. According to the data specified in table 3, it is worth noting that light distillate fractional yield is equal to 37.0-50.8 % depending on the temperature of thermal cracking. Besides, the yield of gasoline fraction increases with a boiling temperature up to 180 °C increases from 6.2 % at a temperature of 668 K up to 21.2 % and at a temperature of 708 K the yield of diesel fraction with a boiling temperature of 180-360 °C is equal to 30.8-23.2 %, correspondingly.

Table 2 – Comparison of experimental and design data on the dependence of total light distillate yield on quantity of slate and fractions >360 °C

Total yield of light products		$\Delta = (\text{exp.} - \text{calc.})$	$100*\Delta/\text{exp.}, \%$
experiment	calculation		
29,0	28,74	0,26	0,8966
35,8	36,11	-0,31	-0,8659
42,6	42,91	-0,31	-0,7277
50,8	50,42	0,38	0,7480
59,0	59,05	-0,05	-0,0848

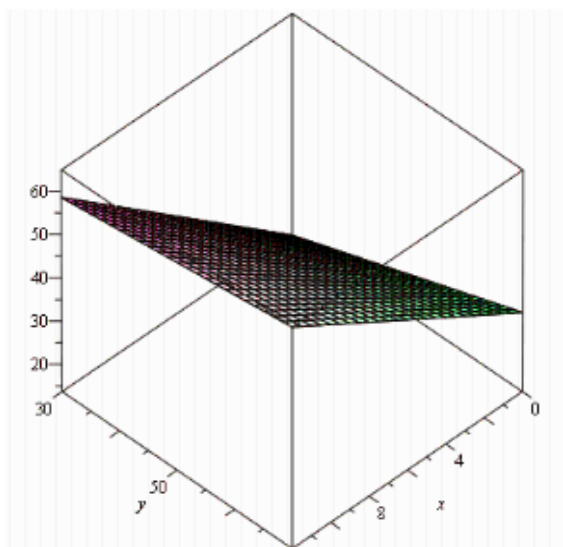


Figure 1 –
The graph of the function G (x, y)

Table 3 – Influence of temperature on thermal cracking of fuel oil mixed with slate (9 % of slate, 60 min, 5 MPa)

The thermolysis product	Temperature, K				
	668	678	688	698	708
Gas	3,0	4,4	5,5	7,1	9,1
Fraction up to 180 °C	6,2	11,9	13,5	17,6	21,2
Fraction 180-360 °C	30,8	34,9	37,3	31,0	23,2
Fraction > 360 °C	60,0	48,8	43,3	44,3	46,5
The total yield of light distillates	37,0	46,8	50,8	48,6	44,4

According to the data specified in table 3, the diagram of dependence of total light distillate yield on the process temperature is constructed (figure 2). It is shown on the figure that light distillate yield has a polynomial dependence on temperature ($R=0.9845$).

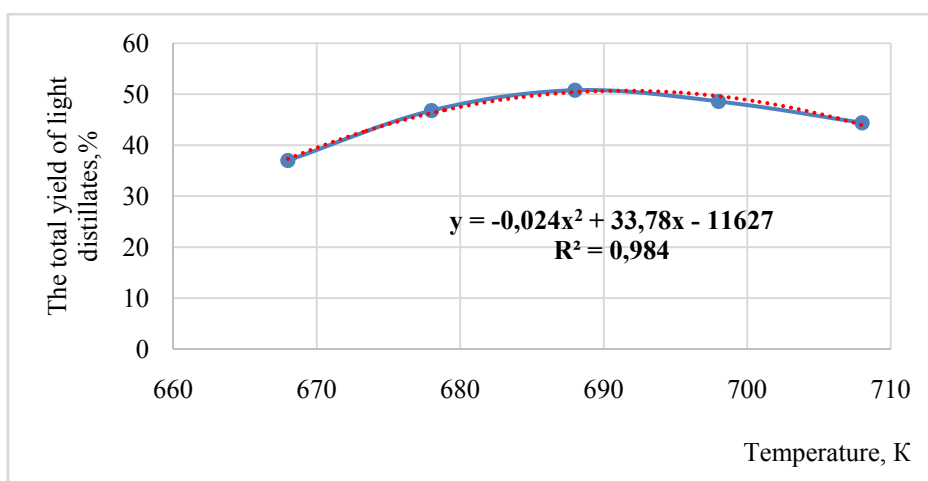


Figure 2 – Dependence of light distillate yield on thermal cracking temperature

The function describing total light distillate yield $G(t, n)$ of t temperature and fractional yield 360°C n , is the following:

$$G(t, n) = 0,1492*t + 3,663*n - 0,007045*t*n \quad (2)$$

Function repeatability is specified in table 4, and its diagram is shown on figure 3 in 3-D coordinates.

Table 4 – Comparison of experimental and design data
on the dependence of total light product yield on temperature and fractions >360°C

Total yield of light products		$\Delta=(\text{exp.}-\text{calc.})$	100* $\Delta/\text{exp.}$, %
experiment	calculation		
37,0	37,1	-0,1	-0,2703
46,8	46,9	-0,1	-0,2137
50,8	51,3	-0,5	-0,9843
48,6	48,6	0	0
44,4	44,0	0,4	0,9009

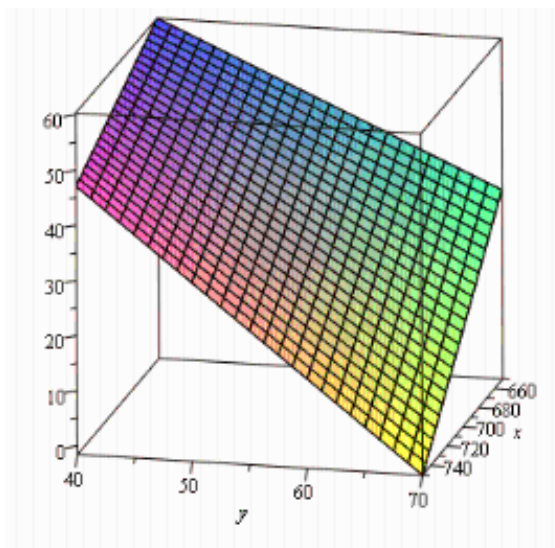


Figure 3 – The graph of the function $G(t, n)$

The results of investigation of influence of thermal cracking time duration on main results of the process (table 5) show that when the time of reaction changes from 10 to 60 minutes, the yield of gasoline fraction increases (from 7.5 to 13.5 %) and yield of medium distillates increases (from 22.6 to 37.3 %), which are better than indices of industrial process of thermal cracking of such type of raw material.

Table 5 – Results of thermal cracking of fuel oil mixed with slate at a various time duration of the process
(688 K, 9 % slate, 5 MPa)

The thermolysis product	Thermolysis time, min				
	10	15	30	45	60
Gas	2,0	2,8	3,7	5,2	5,5
Fraction up to 180 °C	7,5	8,9	10,5	13,5	13,5
Fraction 180-360 °C	22,6	28,3	33,1	36,9	37,3
Fraction > 360 °C	67,5	60,0	52,7	44,4	43,3
Coke on a solid phase	2,4	2,8	3,7	5,2	5,5
The total yield of light distillates	30,1	37,2	43,6	50,4	50,8

According to tables 1, 3, 5, the yields of gasoline fractions with a boiling temperature up to 180 °C is equal to 13.5-20.0 % at a temperature of 688 K, and the yield of diesel fractions is equal to 37.3-39 %. Gasoline and diesel fractions of cracking (table 6) contain moderate quantity of aromatic hydrocarbons (25.5 and 30.1%, correspondingly), unsaturated compounds (iodine value is equal to 1.5 and 3.9) and very small amount of sulphur (0.01-0.04 wt. %), that ensures compliance with modern requirements for gasoline and diesel fuels according to environmentally hazardous components.

Table 6 – Specification of distillate products of thermal cracking of fuel oil mixed with slate

Index	Fractions with b.t., °C	
	up to 180	180-360
Density at 20 °C, g/cm ³	0,7460	0,8696
The refractive index, n_D^{20}	1,4200	1,4795
Group hydrocarbon composition, wt. %		
paraffin + naphthenic	74,5	69,6
aromatic	25,5	30,1
Iodine number, g J2 / 100 g of product	1,5	3,9
Element composition, wt. %:		
C	85,50	87,14
H	13,82	12,81
S	0,01	0,04
N	0,08	0,01

Conclusion. Therefore, to optimize the conditions of thermal cracking, the investigation has been carried out using simple slate of Kenderlyk deposit as activating agent. The influence of slate concentration, temperature and time of reaction on thermal cracking product yield has been studied. According to the yield of distillate fractions, the following can be considered as optimal conditions of reaction: temperature 688 K, time of treatment 60 minutes and quantity of activating agent (slate) 9 wt. %. Total light distillate fractional yield under optimal conditions reaches 50.8 wt. %.

REFERENCES

- [1] Strizhakova Ju.A., Usova T.V., Tret'jakov V.F. // Vestnik MITHT. Himija i tehnologija organicheskikh veshhestv. **2006**. N 4. P. 76-85 (in Russ.).
- [2] Judovich Ja.Je. Gorjuchie. Syktyvkar: Geoprint, **2013**. 90 p. (in Russ.).
- [3] Strizhakova Ju.A., Usova T.V. // Himija tverdogo topliva. **2008**. N 4. P. 7-12 (in Russ.).
- [4] Maloletnev A.S., Yulin M.K., Vol'Epshtein A.B. // Solid Fuel Chemistry. **2011**. Vol. 45, N 4. P. 233-238 (in Eng.).
- [5] Julin M.K., Maloletnev A.S., Gagarin S.G., Zimina E.S., Kudrjavceva T.A. // Himija tverdogo topliva. **1996**. N 6. P. 36-41 (in Russ.).
- [6] Maloletnev A.S., Naumov K.I., Shvedov I.M., Mazneva O.A. // Solid Fuel Chemistry. **2011**. Vol. 45, N 5. P. 316-321. (in Eng.).
- [7] Karabalin U., Serikov F., Lyzlov O., Jakupova E., Makishev E., Kairbekov Zh., Ismagulov M. // Vestnik KazNU. Ser. him. **2011**. N 1(61). P. 61 (in Russ.).
- [8] Kairbekov Zh., Emel'janova V.S., Myltykbaeva Zh.K., Bajzhomartov B.B. // Fundamental'nye issledovanija. **2012**. N 9 (chast' 4). P. 924-926 (in Russ.).
- [9] Gyul'maliev A.M., Kairbekov Zh.K., Maloletnev A.S., Emel'janova V.S., Myltykbaeva Zh.K. // Solid Fuel Chemistry. **2013**. Vol. 47, N 6. P. 360-364 (in Eng.).
- [10] Gyul'maliev A.M., Maloletnev A.S., Kairbekov Zh.K., Emel'janova V.S., Myltykbaeva Zh.K. // Solid Fuel Chemistry. **2014**. Vol. 48, N 2. P. 112-116 (in Eng.).
- [11] Kajrolla S., Dzheldybaeva I.M., Kairbekov Zh., Maloletnev A.S. // 4-aja Mezhdunarodnaja Rossijsko-kazahstanskaja nauchno-prakticheskaja konferencija « Himicheskie tehnologii funkcional'nyh materialov». Almaty, Kazahstan, 12-13 aprelja **2018**. P. 142-144 (in Russ.).
- [12] Patent Respubliki Kazahstan N 32504 s prioritetom ot 12.02.2016. Kairbekov Zh.K., Maloletnev A.S., Kairbekov A.Zh., Myltykbaeva Zh.K., Dzheldybaeva I.M. Opubl. 30.11.2017. Bjul. N 22 (in Russ.).
- [13] Kairbekov Zh.K., Maloletnev A.S., Emel'janova V.S., Myltykbaeva Zh.K., Shakieva T.V., Bajzhomartov B.B. // Tezisy dokladov IV-Mezhdunarodnoj nauchno-tehnicheskoy konferencii, Minsk, 28-30 maja, **2013**. P. 52 (in Russ.).
- [14] Kairbekov Zh.K., Maloletnev A.S., Emel'janova V.S., Myltykbaeva Zh.K., Shakieva T.V., Bajzhomartov B.B. // Al'ternativnye istochniki syr'ja i topliva / Tezisy dokladov IV-Mezhdunarodnoj nauchno-tehnicheskoy konferencii, Minsk, 28-30 maja, **2013**. P. 51 (in Russ.).
- [15] Maloletnev A.S., Kairbekov Zh.K., Smagulova N.T., Kairbekov A.Zh. // Solid fuel chemistry, **2016**. Vol. 50(3). P. 158-162 (in Eng.).
- [16] Kairbekov Zh.K., Lyzlov O.A., Jakupova Je.N., Emel'janova V.S., Shakieva T.V., Myltykbaeva Zh.K. // Vestnik KazNU. Ser. him. **2011**. N 1(61). P. 505-508 (in Russ.).
- [17] Kairbekov Zh.K., Karabalin U.S., Jakupova Je.N., Emel'janova V.S., Shakieva T.V., Myltykbaeva Zh.K. // Vestnik KazNU. Ser. him. **2011**. N 1(61). P. 502-505 (in Russ.).
- [18] Malolentov, Bajzhomartov B.B. // Vestnik KazNU. Ser. him. **2012**. N 4(68). P. 119-126 (in Russ.).

[19] Kairbekov Zh.K., Jubanov K.A., Karabalin U.S., Emelianova V.S., Serikov F.T., Lyzlov O.A., Yakupova E.N., Shalkieva T.V., Kusainov A.T., Myltykbaeva J.K., Makishev E.A. // Science of Central Asia. 2011. N 1-2. P. 44-53 (in Eng.).

[20] Kairbekov Zh.K., Yemelyanova V.S., Myltykbaeva Z.K., Bayzhomartov B.B. // European Journal Of Natural History. 2012. N 5. P. 17-18 (in Eng.).

Ж. К. Каирбеков¹, И. М. Джелдыбаева¹, Э. Т. Ермолдина¹, А. С. Малолетнев²

¹Әл-Фараби атындағы Қазақ ұлттық университеті, Алматы, Қазақстан,

²Горный институт НИТУ МИСиС, Москва

МАЗУТ ПЕН ТАҚТАТАС ҚОСПАСЫН ТЕРМИЯЛЫҚ КРЕКИНГІЛЕУ

Аннотация. Мақалада мотор отындары мен каталитикалық крекингке арналған шикізат алу мақсатында Жаңажол кен орнының мазутын жанғыш тақтатас қоспасында термиялық крекингтеу үрдісінің нәтижелері келтірілген. Сызықтық емес регрессиялық талдау әдісімен жеңіл дистиллят фракцияларының тақтатас концентрациясына (3-12 масс.%), температураға (668-708 К) және термокрекингті жүзеге асыру ұзақтылығына (10-60 мин.) тәуелділіктері анықталды. Жеңіл дистилляттардың шығымына қарайтын болсақ, оңтайлы деп 688 К температураны, 60 минут уақытты және 9 масс. % тақтатас концентрациясын айтуға болады. Осы оңтайлы жағдайларда жеңіл сұйық өнімдер шығымы 50,8 масс. %-ға жететіндігі дәлелденді. Алынған жеңіл крекинг дистилляттарының құрамында орташа мөлшерде ароматты (25,5-30,1%) және қанықпаған көмірсутектер (йод саны 1,5-3,9) анықталған. Сонымен қатар, экологиялық қауіпті компоненттері бойынша бензин мен дизель отындарына қойылатын талапты қанағаттандыратын күкірт мөлшері (0,01-0,04 масс.%) өте аз екендігі анықталды.

Түйін сөздер: термиялық крекинг, белсендіргіш қоспалар, тақтатас, мазут.

Ж. К. Каирбеков¹, И. М. Джелдыбаева¹, Э. Т. Ермолдина¹, А. С. Малолетнев²

¹РГП Казахский национальный университет имени аль-Фараби
ДГП НИИ Новых химических технологий и материалов, г. Алматы

²Горный институт НИТУ МИСиС, Москва

ТЕРМИЧЕСКИЙ КРЕКИНГ МАЗУТА В СМЕСИ СО СЛАНЦЕМ

Аннотация. Приведены результаты исследования термического крекинга нефтяного мазута месторождения «Жаңажол» в смеси с горючим сланцем для получения моторных топлив и сырья для каталитического крекинга. Методом нелинейной регрессии определены зависимости выхода светлых дистиллятных фракций от концентраций сланца (3-12 масс.%), температуры (668-708 К) и времени осуществления термокрекинга (10-60 мин.). Судя по выходу светлых дистиллятов оптимальными условиями реакции можно считать: температуру 688 К, время переработки 60 минут и количество активирующей добавки (сланца) 9 масс. %. Суммарный выход светлых дистиллятных фракций при этих условиях достигает 50,8 масс. %. Полученные светлые дистилляты крекинга содержат умеренное количество ароматических углеводородов (25,5-30,1%), непредельных соединений (йодное число равно 1,5-3,9) и очень малое количество серы (0,01-0,04 масс.%), что обеспечивает современные требования на автобензины и дизельные топлива по экологически опасным компонентам.

Ключевые слова: термокаталитический крекинг, активирующие добавки, сланец, мазут.

Information about authors:

Kairbeko Zhaksyntay Kairbekovich – Doctor of Chemical Sciences, Professor, Head of the Laboratory of SSE Scientific Research Institute New Chemical Technologies and Materials RSE al-Farabi Kazakh National University; zh_kairbekov@mail.ru; <https://orcid.org/0000-0002-0255-2330>

Jeldybaeva Indira Mukhametkerimovna – Ph.D., doctor, Senior researcher SSE Scientific Research Institute New chemical technologies and materials RSE al-Farabi Kazakh National University; indiko_87@mail.ru; <https://orcid.org/0000-0002-1524-4046>

Yermoldina Elmira Tleubaevna – Ph.D., doctor, Senior researcher SSE Scientific Research Institute New chemical technologies and materials RSE al-Farabi Kazakh National University; ermoldina@mail.ru; <https://orcid.org/0000-0002-8567-1342>

Anatoly Maloletnev – Doctor of Chemical Sciences, Professor, National Research Technological University "MISiS", Moscow, Russia; anstanmal@mail.ru; <https://orcid.org/0000-0003-1952-9660>

Publication Ethics and Publication Malpractice in the journals of the National Academy of Sciences of the Republic of Kazakhstan

For information on Ethics in publishing and Ethical guidelines for journal publication see <http://www.elsevier.com/publishingethics> and <http://www.elsevier.com/journal-authors/ethics>.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see <http://www.elsevier.com/postingpolicy>), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service <http://www.elsevier.com/editors/plagdetect>.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации в журнале смотреть на сайте:

www.nauka-nanrk.kz

ISSN 2518-1467 (Online), ISSN 1991-3494 (Print)

<http://www.bulletin-science.kz/index.php/ru/>

Редакторы *М. С. Ахметова, Т. М. Апендиев, Д. С. Аленов*
Верстка на компьютере *Д. Н. Калкабековой*

Подписано в печать 10.10.2018.
Формат 60x881/8. Бумага офсетная. Печать – ризограф.
11,2 п.л. Тираж 500. Заказ 5.